

SPECIFICATIONS

Watts	22W
Lumens	1150LM (90CRI), 1200LM (80CRI)
Efficacy	64LM/W (90CRI), 66LM/W (80CRI)
CRI	80, 90
Input	120V
Dimming	Dimmable to 10% with most standard TRIAC dimmers.
Temperature	3000K, 4000K, 5000K
Dimensions	Ø 9" x 0.625"H
Trim Finish	White, Black, Brushed Nickel
Installation	80CRI: Compatible with Standard & pancake j-box 90CRI: Compatible with Standard j-box only
Features	Integral driver allows installation in ceilings with limited plenum space. Features edge-lit technology for even illumination. Provides an affordable alternative to IC-Airtight housings and Fire-Rated boxes.
Certifications	ETL listed Wet Locations, CA Title 24, JA8, Energy Star. (Note: T24 & JA8 apply to 90CRI only)
Lifespan	50,000 Hours

ORDERING GUIDE

Part	Temperature	CRI	Finish
JLAL-011-CLG-05	30K: 3000K	80: 80CRI	WH: White
	40K: 4000K	90: 90CRI	BK: Black
	50K: 5000K		BN: Brushed Nickel

INSTALLATION


INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS
READ ALL INSTRUCTIONS

IMPORTANT SAFETY INSTRUCTIONS

SAVE THESE INSTRUCTIONS



TOOLS AND MATERIALS REQUIRED:

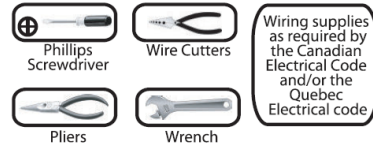


SAFETY PRECAUTIONS:

- 1. TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION OF LIGHT FIXTURE.**
- 2. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.**
- 3. CAUTION RISK OF FIRE . CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.**
- 4. FOR EXETEMAL USE ONLY,RECOMMEND APPLYING WATERPROOF SILICONE TO SEAL AROUND TRIM AND CEILING.**




PACKAGE CONTENTS


PART	DESCRIPTION	QTY	NOTE
A	LED Low Profile Flushmount	1	
B	Mounting screws	2	
C	Wire nut	3	
D	Mounting plate	1	
E	Springs	2	Optional
F	E26 lamp holder	1	Optional

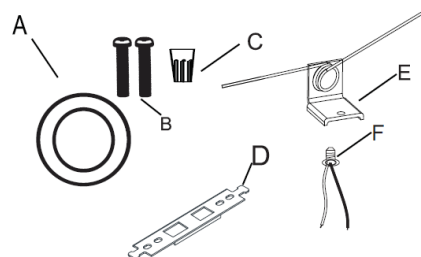


Option #1: FLUSH MOUNT



- 1.** Prior to installation, install mounting plate into the electrical outlet box with mounting screws. Drive screws completely to the end of the junction box.




- 2.** Connect supply wires to wires on fixture with wire nuts or push wires into Quick Connector. Connect white to white, black to black, and copper wire to copper wire as grounding connection.




- 3.** Completing the installation by pushing the fixture into the mounting plate

THIS LED light is suitable to be dimmed by LUTRON # CTCL- 153P ,PVCL-153P

Option #2: RETROFIT A RECESSED CAN




Insert wires into Quick connector. Black to black and white to white. Attach ground wire to ground screw in recessed can.



Turn E26 lamp holder into socket base.

Connect Quick Connectors
Tuck all wires into recessed can. Squeeze springs and push up into recessed can.

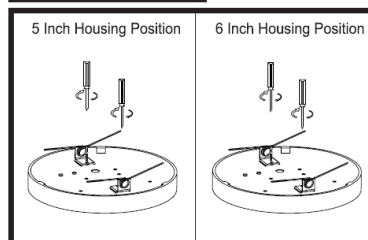

MADE IN CHINA