




## SPECIFICATIONS

Watts	48W
Lumens	6204-6487LM
CRI	80, 90
Input	120-277V
Dimming	Non-Dimming
Temperature	3000K, 4000K, 5000K
Beam Spread	15°, 30°, 45°
Dimensions	8.77"L x 6.29"W x 10.62"H
Material	Aluminum & Tempered Glass
Finish	Black, White, Gray, Silver, Bronze
IP Rating	IP65
Certifications	ETL, CE
Applications	Ground, Wall
Features	210° Rotation, 360° Light Disbursement
Lifespan	30,000+ Hours
Warranty	5 Years

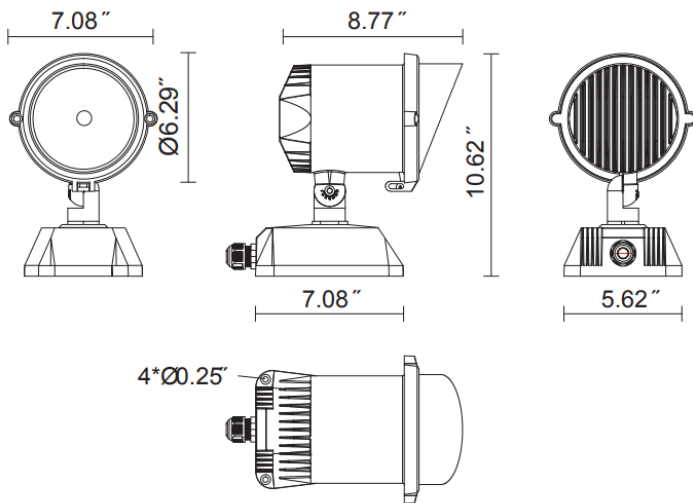

## ORDERING GUIDE

Part	Temperature	CRI	Beam Spread	Cover Frame	Gear Box	Finish
JLAL-004-SPF-06	30K: 3000K	80: 80CRI	15: 15°	CR: Ring	R: Round	BK: Black
	40K: 4000K	90: 90CRI	30: 30°	CV: Angled Visor	T: Trapezoid	WH: White
	50K: 5000K		45: 45°	CF: Full Visor		GY: Gray

### Options

GS: Ground Stake	M: Marine Ambient
TS: Tree Strap	Corrosion Resistance
H: Honeycomb	

BZ: Bronze



## ACCESSORIES

### COVER FRAME



Ring



Full Visor



Angled Visor

### GEAR BOX



Round



Trapezoid

### MOUNTING



Ground Stake



Tree Strap