



SPECIFICATIONS

Watts	3W, 5W, 9W, 14W, 18W, 22W
Lumens	260-280LM (3W) 420-480LM (5W) 760-1000LM (9W) 1120-1360LM (14W) 1530-1770LM (18W) 1900-2100LM (22W)
CRI	80
Input	120V
Dimming	Dimmable with TRIAC or ELV Dimmers
Temperature	3000K, 4000K, 5000K
Beam Spread	160°
Dimensions	3W: 9"L x 0.5"W x 0.625"H 5W: 11.5"L x 0.5"W x 0.625"H 9W: 22.625"L x 0.5"W x 0.625"H 14W: 34.5"L x 0.5"W x 0.625"H 18W: 46.25"L x 0.5"W x 0.625"H 22W: 58"L x 0.5"W x 0.625"H
Material	Extruded Aluminum & Milky PC Lens
Certifications	ETL for Dry/Damp locations, Energy Star
Applications	Surface Mount
Features	No shadow linking connector (included) Link up to 10 fixtures Installs with metal mounting clips
Lifespan	50,000+ Hours
Warranty	5 Years

ORDERING GUIDE


Part	Watts	Temperature	Options
JLAL-011-LIN-05	3: 3W	30K: 3000K	HB: Hardwire Box (with switch)
	5: 5W	40K: 4000K	FC: Flexible Connector
	9: 9W	50K: 5000K	PC: 6FT Power Cord
	14: 14W		MB: Mounting Bracket
	18: 18W		
	22: 22W		

LINEAR LED LIGHT BAR


just led + lights



DIMENSIONS

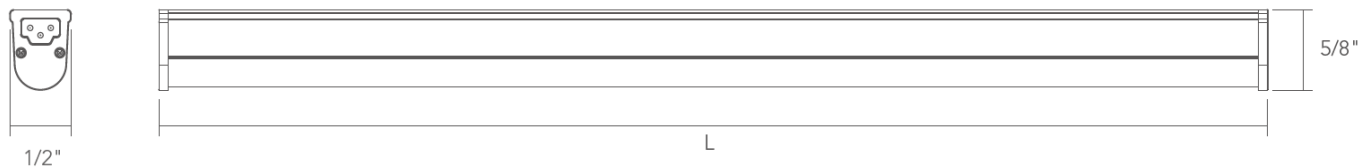

LINKING OPTIONS

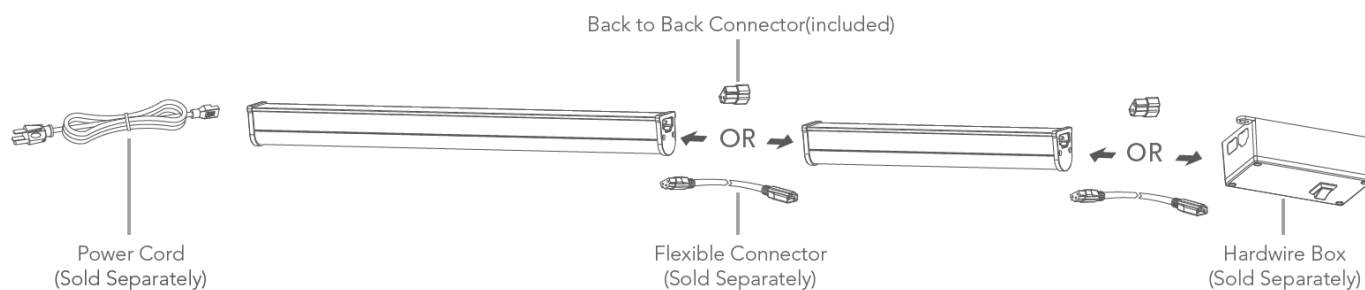

Optional Flex Connector



End to End Linking to
Eliminate Shadows

ACCESSORIES

