




## SPECIFICATIONS

Watts	11W, 15W, 11Wx2, 15Wx2
Lumens	15W: 1165LM 15Wx2: 2330LM
CRI	80
Input	100-277V
Temperature	3000K, 4000K, 5000K
Beam Spread	15°, 23°, 38°, 45°, 60°
Dimensions	8.26" L x 6.3" W x 13" H
Material	Aluminum & Tempered Glass
Finish	Black, White, Gray, Silver, Bronze
IP Rating	IP65
Certifications	ETL, CE
Applications	Wall
Lifespan	50,000+ Hours
Warranty	5 Years

## ORDERING GUIDE

Part	Type	Watts	Temperature	Beam Spread	Finish	Options
JLAL-004-WAL-010	U: Up Light	11: 11W	30K: 3000K	15: 15°	BK: Black	T: 20° Tilt to Wall
	D: Down Light	15: 15W	40K: 4000K	23: 23°	WH: White	M: Marine Ambient
	UD: Up Down Light		50K: 5000K	38: 38° 45: 45° 60: 60°	GY: Gray SL: Silver BZ: Bronze	Corrosion Resistance MP: Mounting Plate for Standard JBox

DIMENSIONS

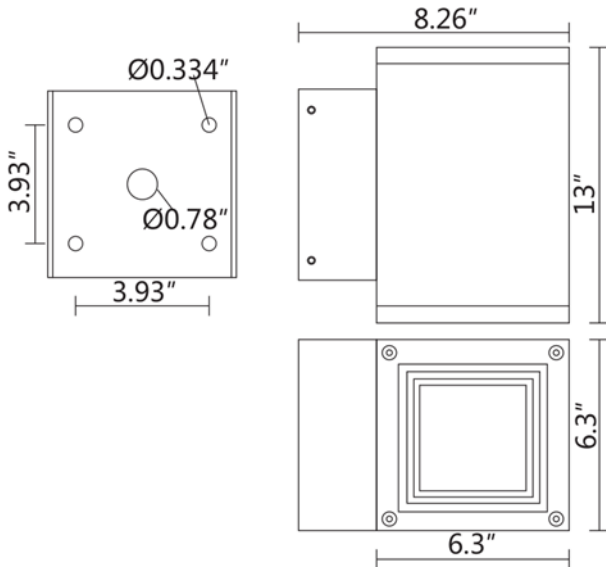

PHOTOMETRICS

