




## SPECIFICATIONS

Watts	U: 4W D: 4W UD: 4Wx2
Lumens	U: 365LM D: 365LM UD: 730LM
CRI	80
Input	100-277V
Temperature	3000K, 4000K, 6000K
Beam Spread	15°, 23°, 38°, 45°, 60°
Dimensions	6.22"L x 4.72"W x 10.8"H
Material	Aluminum & Tempered Glass
Finish	Black, White, Gray, Silver, Bronze
IP Rating	IP65
Certifications	ETL, CE
Applications	Wall
Lifespan	50,000+ Hours
Warranty	5 Years

## ORDERING GUIDE

Part	Type	Temperature	Beam Spread	Finish	Options
JLAL-004-WAL-08	U: Up Light	30K: 3000K	15: 15°	BK: Black	T: 20° Tilt to Wall
	D: Down Light	40K: 4000K	23: 23°	WH: White	M: Marine Ambient
	UD: Up / Down Light	60K: 6000K	38: 38° 45: 45° 60: 60°	GY: Gray SL: Silver BZ: Bronze	Corrosion Resistance MP: Mounting Plate for Standard JBox

DIMENSIONS

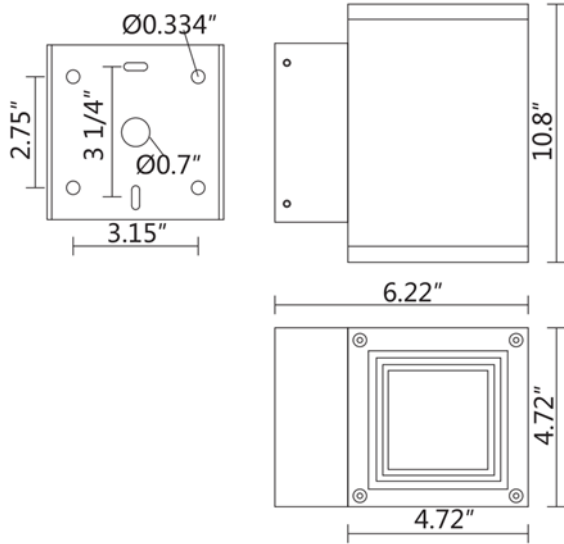

PHOTOMETRICS

