







SPECIFICATIONS

Watts	20W
Lumens	1500LM-1700LM (4") 1600LM-1800LM (6")
CRI	80
Input	110-347V
Dimming	1-10V
Temperature	3000K, 3500K, 4000K, 5000K, Adjustable CCT (30K, 35K, 40K), (30K, 40K, 50K)
Beam Spread	112°
Dimensions	4": 23.70"L x 4.25"W x 0.94"H 6": 23.70"L x 5.75"W x 0.94"H
Material	Aluminum
Finish	White
Certifications	UL damp rated
Applications	Surface, Recessed
Lifespan	50,000+ Hours
Warranty	5 Years

ORDERING GUIDE

Part	Type	Temperature	Options
JLAL-008-LIN-04	4: 4IN	30K: 3000K	SM: Surface Mount
	6: 6IN	35K: 3500K	RM: Recessed Mount
		40K: 4000K	MS: Motion Sensor
		50K: 5000K	DS: Daylight Sensor
		ADJ40: 30K, 35K, 40K	
		ADJ50: 30K, 30K, 50K	

DIMENSIONS

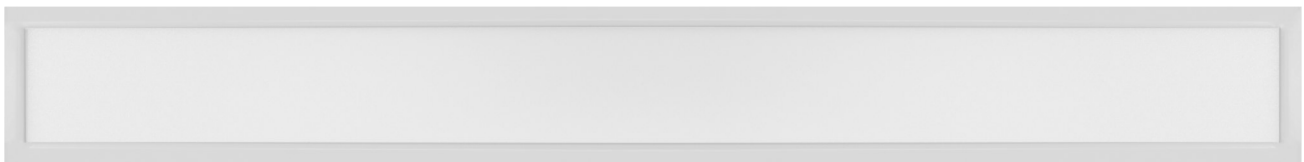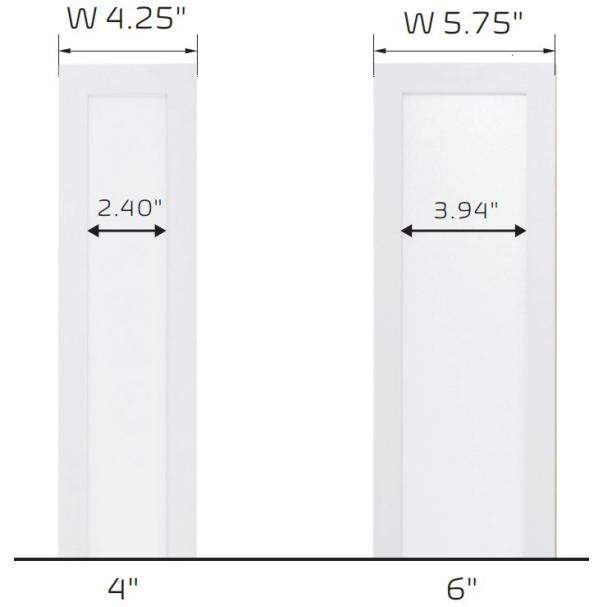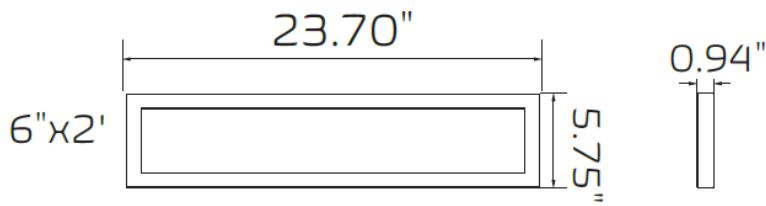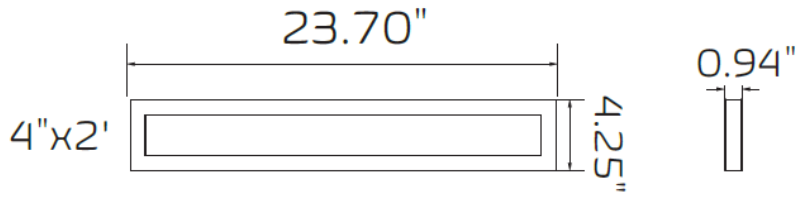

INSTALLATION

1

B. Slide the surface mount plate towards the arrow.

C. Remove the surface mount plate

A. Unscrew the surface mount plate

Prepare the fixture

2

A. Install the surface mount plate to the ceiling.

B. Mount the safety cable.

Attach the surface mount plate

3

Wire connections

Proper wire connections and mount the fixture