



4FT UP/DOWN LED LIGHT

just led + lights



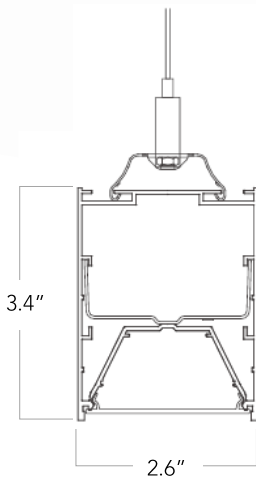

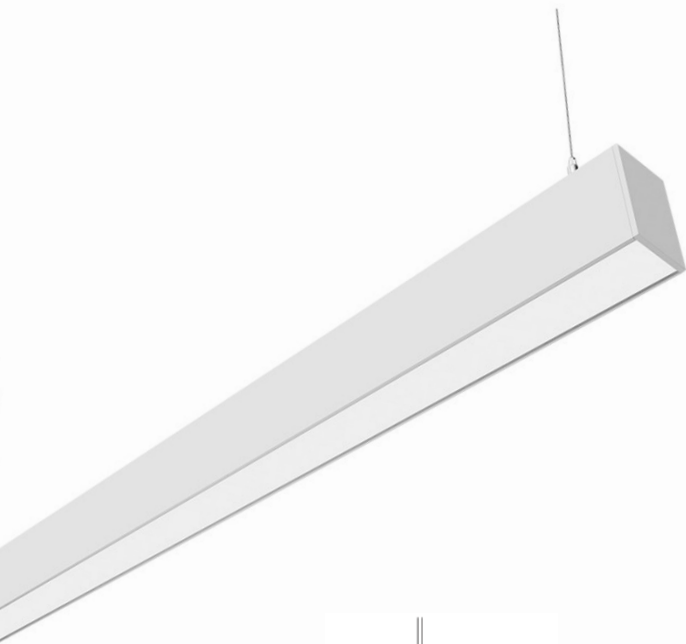





SPECIFICATIONS

Watts	33W, 44W
Total Lumens	4500LM (33W), 6000LM (44W)
Directional Lumens	33W: 1500LM Up / 3000LM Down 44W: 3000LM Up / 3000LM Down
CRI	80, 90
Input	100-277V
Dimming	0-10V
Temperature	3000K, 3500K, 4000K
Beam Spread	120°
Dimensions	48"L x 2.6"W x 3.4"H (Continuous Runs Available) 5ft Power Cord & Suspension Kit
Finish	White, Black
Material	Aluminum, Frosted Acrylic Lens
Certifications	cETL
Applications	Suspended
Lifespan	50,000+ Hours
Warranty	5 Years





ORDERING GUIDE

Part	Watts	Temp	CRI	Finish	Quantity (Specify)
JLAL-089-LIN-01 Single Fixture	33: 33W	30K: 3000K	80: 80CRI	WH: White	<input type="text"/>
JLAL-089-LIN-01-S Continuous Run START	44: 44W	35K: 3500K	90: 90CRI	BK: Black	<input type="text"/>
JLAL-089-LIN-01-M Continuous Run MIDDLE		40K: 4000K			<input type="text"/>
JLAL-089-LIN-01-E Continuous Run END					<input type="text"/>

ACCESSORY ORDERING GUIDE

Part	Image	Quantity (specify)
JLAL-089-LIN-01-EM 12W 2800mah 90min Emergency Backup		<input data-bbox="1299 447 1485 541" type="text"/>
JLAL-089-LIN-01-MS Motion/Daylight Sensor		<input data-bbox="1299 609 1485 703" type="text"/>
JLAL-089-LIN-01-PC 5FT Power Cord (6 Fixture Max (Continuous Run))		<input data-bbox="1299 766 1485 861" type="text"/>
JLAL-089-LIN-01-PE Power Cord Extension (3FT)		<input data-bbox="1299 919 1485 1014" type="text"/>
JLAL-089-LIN-01-SK 5FT Suspension Kit		<input data-bbox="1299 1071 1485 1165" type="text"/>
JLAL-089-LIN-01-SE Cable Extension (3FT)		<input data-bbox="1299 1228 1485 1323" type="text"/>
JLAL-089-LIN-01-CW Canopy w/ Wire Way		<input data-bbox="1299 1381 1485 1476" type="text"/>
JLAL-089-LIN-01-CN Canopy No Wire Way		<input data-bbox="1299 1528 1485 1623" type="text"/>

SUSPENDED INSTALLATION

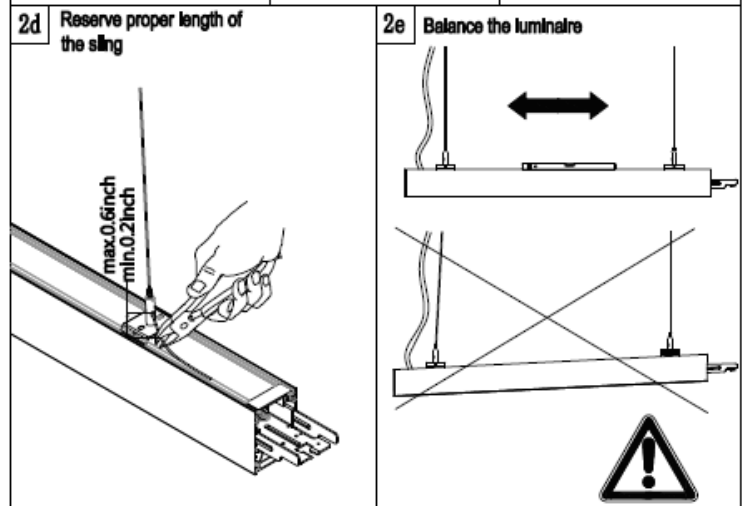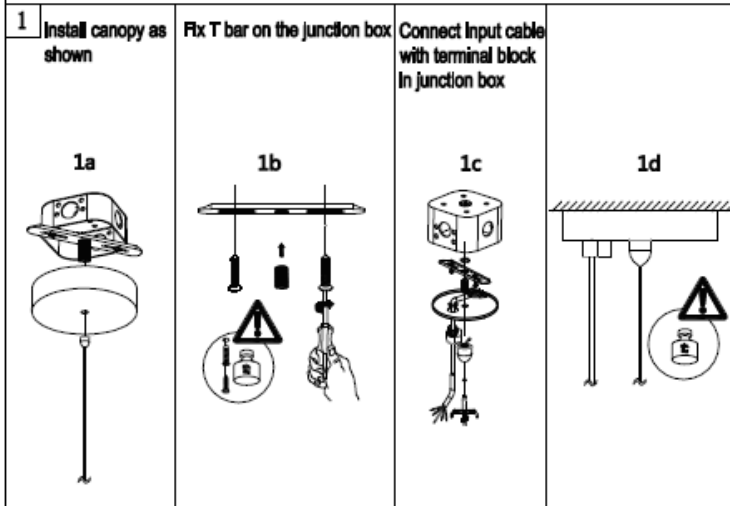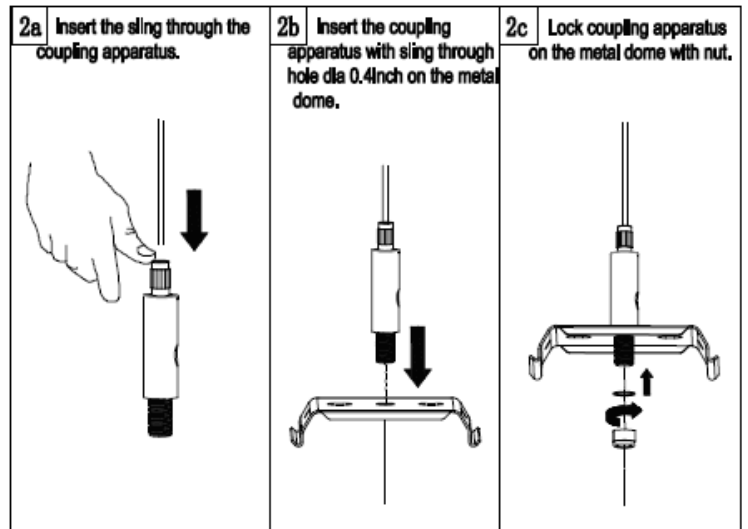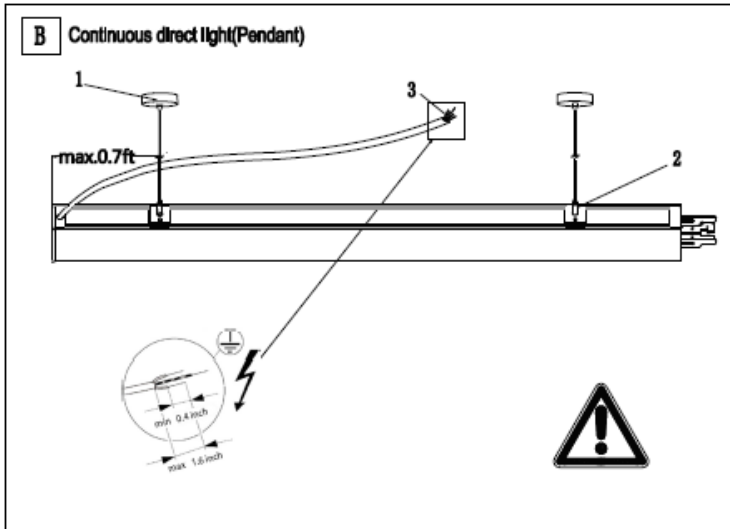

SUSPENDED INSTALLATION

3 Plug male connector into female connector, push continuous linear light directly to connect till tight.

ON

max0.019inch

ELECTRICAL CONNECTIONS:

White - luminaire	White - power cord	For 0-10V Dimming:	
Black - luminaire	Black - power cord	Purple - luminaire	Purple - power cord
Green - luminaire	Green - power cord	Grey - luminaire	Grey - power cord