


## SPECIFICATIONS

Watts	80W, 100W, 120W, 150W, 200W
Lumens	9,600LM (80W) 12,000LM (100W) 14,400LM (120W) 18,000LM (150W) 24,000LM (200W)
CRI	70
Input	120-277V
Dimming	0-10V (optional)
Temperature	3000K, 4000K, 6000K
Beam Spread	60°, 90°
Dimensions	80W: 14.37"L x 14.37"W x 11.22"H 100W: 16.61"L x 16.61"W x 12.80"H 120W: 18.90"L x 18.90"W x 14.37"H 150W: 20.67"L x 20.67"W x 15.35"H 200W: 20.67"L x 20.67"W x 15.35"H
Material	Die Cast Aluminum and Tempered Glass
Finish	Housing: White, Gray, Black Shade: White, Aluminum (clear coat)
IP Rating	IP65
Certifications	cETL, CE, RoHS
Applications	Suspended
Lifespan	50,000+ Hours
Warranty	5 Years


## ORDERING GUIDE

Part	Watts	Temperature	Beam Spread	Housing Finish	Shade Finish	Options
JLAL-007-ARE-01	80: 80W	30K: 3000K	60: 60°	WH: White	WH: White	010: 0-10V Dimming
	100: 100W	40K: 4000K	90: 90°	GY: Gray	AL: Aluminum	
	120: 120W	60K: 6000K		BK: Black		
	150: 150W					
	200: 200W					


## DIMENSIONS

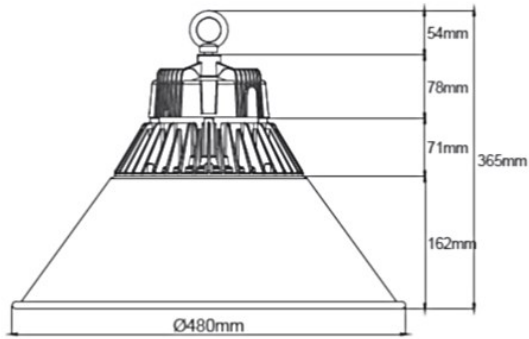


120W

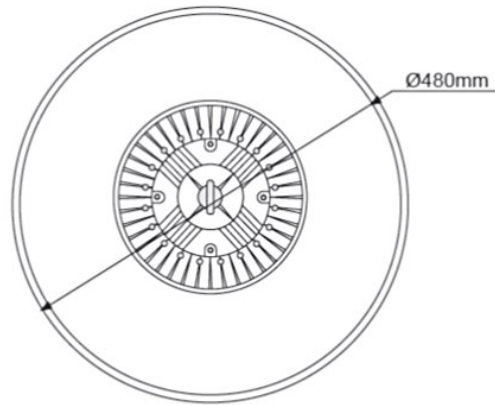


## PHOTOMETRICS




80W

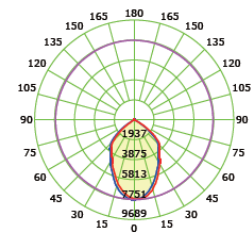

100W



120W

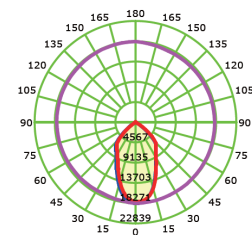

150W

## INSTALLATION

