

# 6IN SLIM PANEL DOWNLIGHT

just led + lights



## SPECIFICATIONS





Watts	12W
Lumens	750LM (90CRI), 800LM (80CRI)
Efficacy	62.5LM/W (90CRI), 67LM/W (80CRI)
CRI	80, 90
Input	120V
Dimming	TRIAC, 0-10V
Temperature	2700K, 3000K, 3500K, 4000K, 5000K
Beam Spread	120°
Dimensions	Round: 6.875"L x 6.875"W x 1"H Hole Cut-out: Ø6.125" Square: 6.875"L x 6.875"W x 0.875"H Hole Cut-out: Ø6.25"
Finish	White, Black, Brushed Nickel
Material	Aluminum, Acrylic
Installation	Easy quick snap installation
Certifications	cETL listed for Wet Locations, Energy Star, CA Title 24 & JA8 (90 CRI only) .
Lifespan	50,000 Hours
Warranty	5 Years-Limited
Features	IC rated, no housing required Fast and easy to install Fits in tight ceilings spaces Glare control lens



## ORDERING GUIDE

Part	Temperature	CRI	Dimming	Trim	Finish
JLAL-011-DNL-07	27K: 2700K	80: 80CRI	TRI: TRIAC	R: Round	WH: White
	30K: 3000K	90: 90CRI	010: 0-10V	S: Square	BK: Black
	35K: 3500K				BN: Brushed Nickel
	40K: 4000K				
	50K: 5000K				

DIMENSIONS

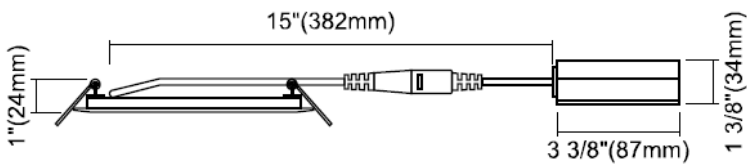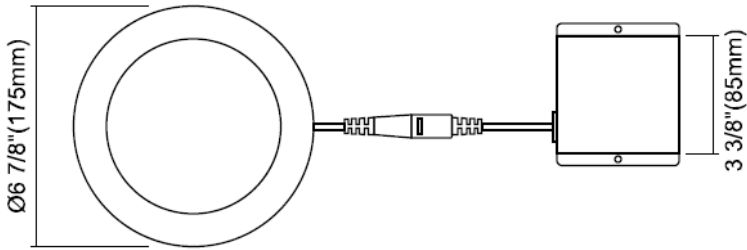

Cut out: Ø6 1/8" (155mm)

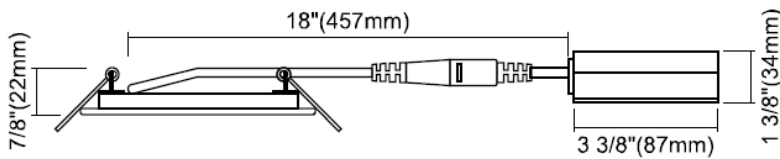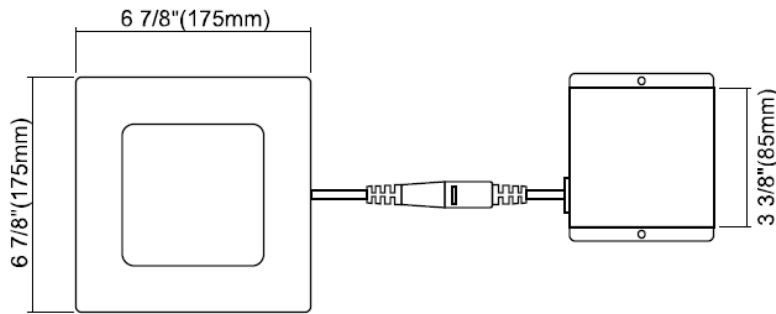

Cut out: Ø6 1/4" (158mm)

INSTALLATION

