



SPECIFICATIONS


Watts	15W
Lumens	900LM
Efficacy	60LM/W
CRI	90
Input	120V
Dimming	TRIAC/ELV to 10%
Temperature	3CCT: 3000K, 4000K, 5000K 5CCT: 2700K, 3000K, 3500K, 4000K, 5000K
Beam Spread	110°
Dimensions	7.3"L x 7.3"W x 2.4"H
Finish	White
Material	Aluminum, Polycarbonate
Installation	Snap-in IDEAL connector and friction clip mounting system.
Certifications	cETL listed for Damp Locations, CA Title 24*, JA8*, Energy Star. LM-79, LM-80 testing performed in accordance with IESNA standards. * T24 and JA8 (up to 4000K)
Lifespan	50,000 Hours
Warranty	5 Years-Limited
Housing Compatibility	Philips: CP6RN, CP6RR Halo: H7ICAT, H7RICAT Juno: IC22 Elite: B6ICA, C6ICA ELCO: EL7ICA

ORDERING GUIDE

Part
JLAL-011-DNL-010

Temperature
3CCT: 3 Color Selectable (30K, 40K, 50K)
5CCT: 5 Color Selectable (27K, 30K, 35K, 40K, 50K)

DIMENSIONS

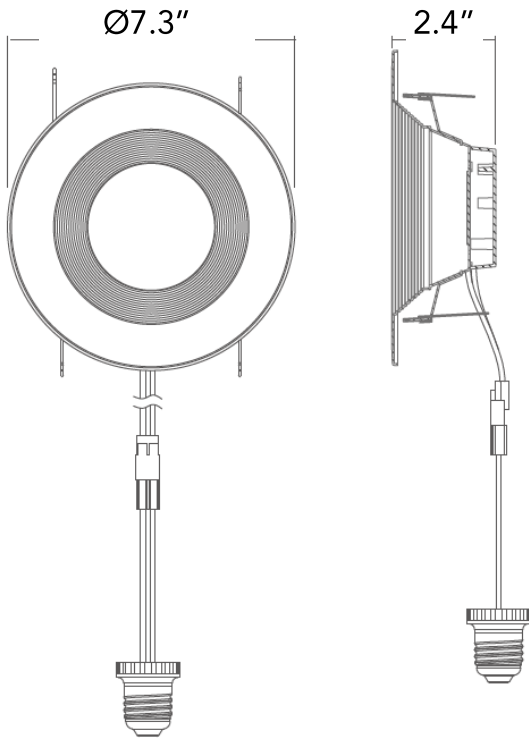

INSTALLATION

